

# TECHNICAL GUIDE

## GAS-FIRED RESIDENTIAL TWO STAGE PSC MULTI-POSITION GAS FURNACES STANDARD & Low NOx MODELS MODELS: TM8T / TMLT

NATURAL GAS  
60 - 120 MBH INPUT



Due to continuous product improvement, specifications are subject to change without notice.

Visit us on the web at [www.york.com](http://www.york.com) for the most up-to-date technical information.

Additional rating information can be found at [www.ahridirectory.org](http://www.ahridirectory.org)

### WARRANTY

20-year limited warranty on the heat exchanger.  
10-year heat exchanger warranty on commercial applications.  
5-year limited parts warranty.

**Extended 10-year limited parts warranty when product is registered online within 90 days of purchase for replacement or closing for new home construction.**

### DESCRIPTION


These compact units employ induced combustion, reliable hot surface ignition and high heat transfer aluminized tubular heat exchangers. The units are factory shipped for installation in upflow or horizontal applications and may be converted for downflow applications.

These furnaces are designed for residential installation in a basement, closet, alcove, attic, recreation room or garage and are also ideal for commercial applications. All units are factory assembled, wired and tested to assure safe dependable and economical installation and operation.

These units are Category I listed and may be common vented with another gas appliance as allowed by the National Fuel Gas Code.

### FEATURES

- Two stage heating operation includes two stage gas valve, two stage inducer operation and 4 speed PSC blower operation. Adjustable delay timer allows two stage operation with a single stage thermostat.
- Easily applied in upflow, horizontal left or right, or downflow installation with minimal conversion necessary.
- Compact, easy to install, ideal height 33" tall cabinet.
- Blower-off delay for cooling SEER improvement.
- Easy access to controls to connect power/control wiring.
- Built-in, high level self diagnostics with fault code display.
- Low unit amp requirement for easy replacement application.
- All models are convertible to use propane (LP) gas.
- Electronic Hot Surface Ignition saves fuel cost with increased dependability and reliability.
- 100% shut off main gas valve for extra safety.
- 24V, 40 VA control transformer and blower relay supplied for add-on cooling.
- Hi-tech tubular aluminized steel primary heat exchanger.
- Solid removable bottom panel allows easy conversion.
- Airflow leakage less than 1% of nominal airflow for ductblaster conditions.
- No knockouts to deal with, making installation easier.
- Movable duct connector flanges for application flexibility.
- Quiet inducer operation, burner, and blower operation.
- Inducer rotates for easy conversion of venting options.
- Fully supported blower assembly for easy access and removal of blower.
- External air filters used for maximum flexibility in meeting customers IAQ needs.
- Insulated blower compartment for thermal and acoustic performance.
- Low NOx models have been designed to meet specific code requirements.
- Venting applications - may be installed as a common vent with other gas-fired appliances or use a masonry chimney.
- 1/4 turn knobs provided for easy independent door removal.

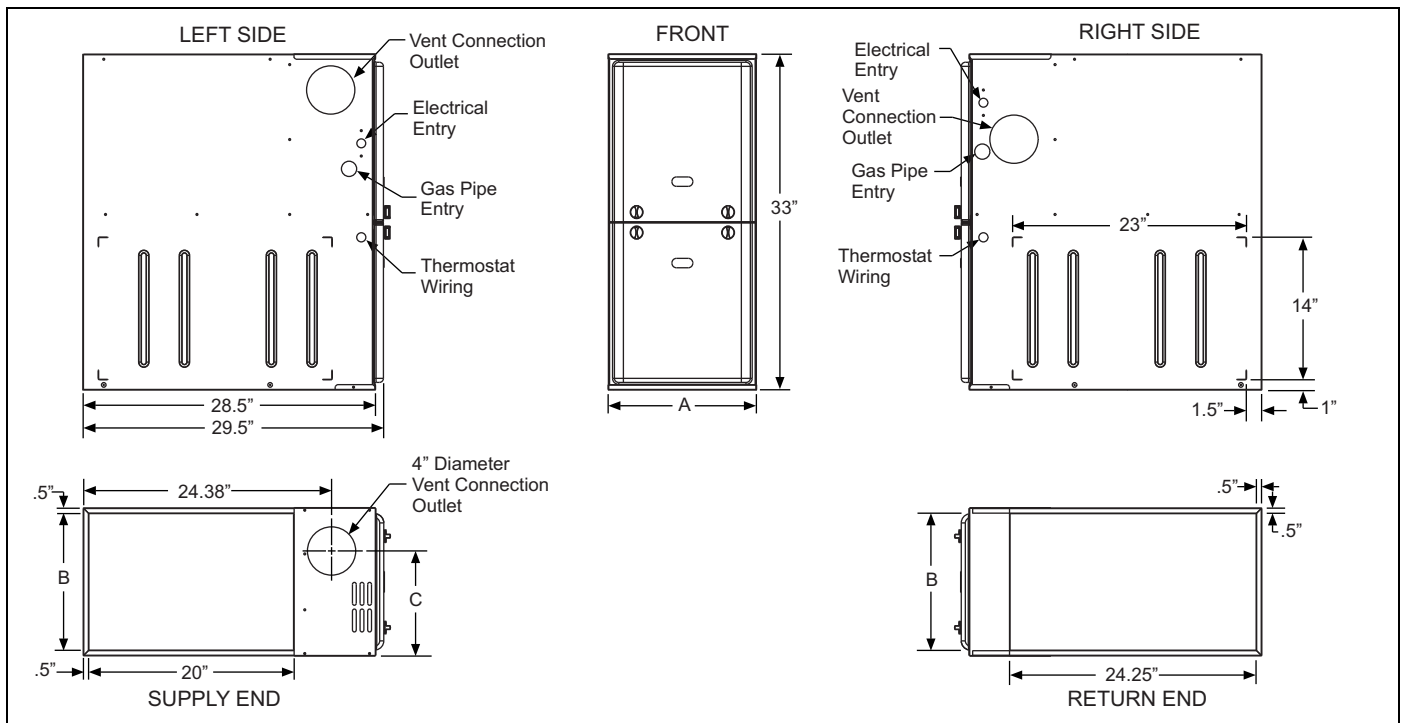

**Cabinet and Duct Dimensions**

Models	Nominal CFM	Cabinet Size	Cabinet Dimensions (Inches)		
			A	B	C
TM(8,L)T060A12MP11	1200	A	14 1/2	13 3/8	10.3
TM(8,L)T080B12MP11	1200	B	17 1/2	16 3/8	11.8
TM(8,L)T080C16MP11	1600	C	21	19 7/8	13.6
TM(8,L)T100C16MP11	1600	C	21	19 7/8	13.6
TM(8,L)T100C20MP11	2000	C	21	19 7/8	13.6
TM(8,L)T120C20MP11	2000	C	21	19 7/8	13.6

Table 1: Ratings & Physical / Electrical Data

Models	High Fire Input	Low Fire Input	High Fire Output	Low Fire Output	Nominal Airflow	AFUE	Max. Over-current Protect	Max. Outlet Air Temp
	MBH	MBH	MBH	MBH				CFM
TM(8,L)T060A12MP11	60	39	47	31	1200	80.0	10	160
TM(8,L)T080B12MP11	80	52	63	42	1200	80.0	10	160
TM(8,L)T080C16MP11	80	52	63	42	1600	80.0	15	160
TM(8,L)T100C16MP11	100	65	80	52	1600	80.0	15	160
TM(8,L)T100C20MP11	100	65	80	52	2000	80.0	20	160
TM(8,L)T120C20MP11	120	78	96	62	2000	80.0	20	160
Models	High Fire Air Temp. Rise	Low Fire Air Temp. Rise	Blower		Blower Size	Total Unit Amps	Min. wire Size (awg) @ 75 ft one way	Operating weight
	°F	°F	HP	Amps				In.
TM(8,L)T060A12MP11	30-60	15-45	1/3	4.8	11 x 8	7.0	14	94
TM(8,L)T080B12MP11	30-60	20-50	1/3	4.8	11 x 8	7.0	14	103
TM(8,L)T080C16MP11	30-60	20-50	1/2	7.0	11 x 10	10.0	14	114
TM(8,L)T100C16MP11	30-60	20-50	1/2	7.0	11 x 10	10.0	14	118
TM(8,L)T100C20MP11	30-60	20-50	1	14.5	11 x 11	17.0	12	122
TM(8,L)T120C20MP11	30-60	20-50	1	14.5	11 x 11	17.0	12	129

Annual Fuel Utilization Efficiency (AFUE) numbers are determined in accordance with DOE Test procedures.

Wire size and over current protection must comply with the National Electrical Code (NFPA-70-latest edition) and all local codes.

The furnace shall be installed so that the electrical components are protected from water.

## HORIZONTAL SIDEWALL VENTING

For applications where vertical venting is not possible, the only approved method of horizontal venting is the use of an auxiliary power vent. Auxiliary power venters must be approved by CSA, UL, or other recognized safety agencies. Follow all application and installation details provided by the manufacturer of the power vent.

## FILTER PERFORMANCE

The airflow capacity data published in the “Blower Performance” table shown represents blower performance WITHOUT filters.

All applications of these furnaces require the use of field installed air filters. All filter media and mounting hardware or provisions must be field installed external to the furnace cabinet. DO NOT attempt to install any filters inside the furnace.

## NOTICE

*Single side return above 1800 CFM is approved as long as the filter velocity does not exceed filter manufacturer's recommendation and a transition is used to allow use on a 20x25 filter.*

## Recommended Filter Sizes

CFM	Cabinet Size	Side (in)	Bottom (in)
1200	A	16 x 25	14 x 25
1200	B	16 x 25	16 x 25
1600	C	16 x 25	20 x 25
2000	C	(2) 16 x 25	20 x 25

- Air velocity through throwaway type filters may not exceed 300 feet per minute (91.4 m/min). All velocities over this require the use of high velocity filters.
- Do not exceed 1800 CFM using a single side return and a 16x25 filter. For CFM greater than 1800, you may use two side returns or one side and the bottom or one return with a transition to allow use of a 20x25 filter.

## Unit Clearances to Combustibles (All dimensions in inches, and all surfaces identified with the unit in an upflow configuration)

Application	Top	Front	Rear	Left Side	Right Side	Flue	Floor/Bottom	Closet	Alcove	Attic	Line Contact
Upflow	1	1	0	0	0	6	Combustible	Yes	Yes	Yes	No
Upflow B-Vent	1	1	0	0	0	1	Combustible	Yes	Yes	Yes	No
Downflow	1	1	0	0	0	6	1 <sup>1</sup>	Yes	Yes	Yes	No
Downflow B-Vent	1	1	0	0	0	1	1 <sup>1</sup>	Yes	Yes	Yes	No
Horizontal	1	1	0	0	0	6	Combustible	No	Yes	Yes	Yes <sup>2</sup>
Horizontal B-Vent	1	1	0	0	0	1	Combustible	No	Yes	Yes	Yes <sup>2</sup>

1. Special floor base or air conditioning coil required for use on combustible floor.

2. Line contact only permitted between lines formed by the intersection of the rear panel and side panel (top in horizontal position) of the furnace jacket and building joists, studs or framing.

## ACCESSORIES

### Propane (LP) Conversion Kit -

1NP0347 - All Models

This accessory conversion kit may be used to convert natural gas units for propane (LP) operation.

### Side Return Filter Racks -

1SR0200 - All Models

1SR0302 - All Models

1SF0101 - All Models

### Bottom Return Filter Racks -

1BR0514 or 1BR0614 - For 14-1/2" cabinets

1BR0517 or 1BR0617 - For 17-1/2" cabinets

1BR0521 or 1BR0621 - For 21" cabinets

1BR05xx series are galvanized steel filter racks. 1BR06xx are pre-painted steel filter racks to match the appearance of the furnace cabinet.

### EAC Transition Kits -

For installation of EAC accessories with these furnaces to provide easy transition of return airflow through the EAC to get the proper sealing and reduced airflow leakage.

1TK1001 - For all models using side return

1TK1014 - For 14-1/2" cabinets using bottom return

1TK1017 - For 17-1/2" cabinets using bottom return

1TK1021 - For 21" cabinets using bottom return

### Combustible Floor Base Kit -

For installation of these furnaces in downflow applications directly onto combustible flooring material, These kits are required to prevent potential overheating situations. These kits are also required in any applications where the furnace is installed in a downflow configuration without an evaporator coil, where the combustible floor base kit provides access for combustible airflow.

1CB0514 - For 14-1/2" cabinets

1CB0517 - For 17-1/2" cabinets

1CB0521 - For 21" cabinets

### Masonry Chimney Kits -

For installations where these furnaces are vented using existing or new lined masonry chimneys.

1CK0603

1CK0604

### High Altitude Pressure Switches -

For installation where the altitude is less than 5,000 feet it is not required that the pressure switch be changed. For altitudes above 5,000 feet, see kits below.

1PS3309

**Thermostats** - Compatible thermostat controls are available through accessory sourcing. For optimum performance and installation, refer to the UPGNET “Low Voltage Wiring Diagram” document to select and apply controls.

**Blower Performance CFM - Any Position**

Models	Speed	Bottom Airflow Data (SCFM)									
		Ext. Static Pressure (in. H2O)									
		0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
<b>Bottom Return (without filter)</b>											
TM(8,L)T060A12MP11	High	1358	1341	1319	1303	1275	1238	1190	1130	1062	943
	Medium High	1097	1083	1075	1064	1042	1024	997	962	906	821
	Medium Low	935	928	920	899	872	840	809	771	731	659
	Low	800	779	763	736	711	687	657	622	584	529
TM(8,L)T080B12MP11	High	1329	1307	1285	1247	1195	1143	1091	1027	927	806
	Medium High	994	1004	1008	984	970	941	893	839	773	669
	Medium Low	786	790	782	781	761	743	726	685	630	540
	Low	655	654	647	629	620	594	560	524	469	399
TM(8,L)T080C16MP11	High	1881	1822	1783	1696	1602	1539	1465	1394	1267	1130
	Medium High	1553	1535	1492	1456	1408	1343	1279	1226	1113	1014
	Medium Low	1312	1286	1288	1260	1205	1143	1091	1029	966	841
	Low	1169	1166	1128	1098	1069	1032	987	909	835	747
TM(8,L)T100C16MP11	High	2069	2014	1956	1885	1820	1748	1668	1577	1468	1362
	Medium High	1662	1656	1639	1608	1586	1544	1491	1421	1338	1204
	Medium	1368	1371	1377	1376	1367	1334	1295	1250	1188	1104
	Low	1016	1014	1018	1030	1012	996	975	944	898	852
TM(8,L)T100C20MP11	High	2893	2774	2687	2589	2478	2376	2255	2120	1978	1824
	Medium High	2272	2243	2204	2169	2086	2018	1940	1842	1743	1602
	Medium Low	1765	1752	1737	1718	1674	1619	1561	1493	1437	1312
	Low	1425	1380	1409	1378	1307	1274	1226	1180	1113	1025
TM(8,L)T120C20MP11	High	2701	2620	2533	2429	2338	2227	2112	1993	1861	1706
	Medium High	2125	2083	2046	1994	1955	1901	1857	1737	1621	1497
	Medium Low	1664	1664	1647	1619	1580	1555	1468	1392	1332	1226
	Low	1358	1339	1330	1318	1286	1235	1185	1141	1060	938
<b>Left Side Return (without filter)</b>											
TM(8,L)T060A12MP11	High	1406	1401	1394	1379	1338	1304	1261	1202	1135	1040
	Medium High	1129	1126	1107	1094	1076	1047	1010	966	921	843
	Medium Low	970	947	933	916	890	863	827	789	741	668
	Low	834	809	797	768	740	710	677	634	586	534
TM(8,L)T080B12MP11	High	1274	1285	1255	1239	1207	1158	1111	1049	979	830
	Medium High	975	974	968	960	948	923	879	823	756	672
	Medium Low	777	771	772	762	752	734	695	651	604	529
	Low	647	634	623	610	602	588	552	506	457	381
TM(8,L)T080C16MP11	High	1825	1781	1746	1695	1641	1587	1521	1429	1330	1184
	Medium High	1516	1493	1482	1464	1442	1411	1343	1275	1192	1035
	Medium	1294	1297	1271	1238	1187	1120	1083	1028	979	851
	Low	1126	1115	1095	1049	1027	996	957	929	840	742
TM(8,L)T100C16MP11	High	2009	1994	1933	1893	1836	1763	1691	1606	1508	1389
	Medium High	1523	1506	1521	1490	1466	1435	1393	1326	1241	1119
	Medium Low	1230	1249	1245	1230	1218	1195	1161	1120	1039	949
	Low	1126	1115	1095	1049	1027	996	957	929	840	742
TM(8,L)T100C20MP11	High	2964	2886	2794	2707	2623	2522	2415	2281	2149	2012
	Medium High	2192	2178	2150	2109	2098	2007	1956	1888	1795	1671
	Medium Low	1699	1695	1706	1632	1612	1568	1519	1460	1392	1293
	Low	1361	1356	1337	1304	1267	1243	1191	1149	1077	994
TM(8,L)T120C20MP11	High	2828	2768	2699	2612	2524	2423	2308	2219	2118	1982
	Medium High	2085	2073	2042	2029	1967	1896	1893	1816	1717	1635
	Medium Low	1620	1631	1636	1593	1567	1557	1520	1476	1407	1263
	Low	1322	1311	1302	1271	1241	1201	1162	1101	1042	979

1. Airflow expressed in standard cubic feet per minute (CFM).
2. Motor voltage at 115 V.
3. Airflow through motor side (right side return) maybe slightly less than the data shown above.

Subject to change without notice. Published in U.S.A.  
 Copyright © 2010 by Johnson Controls, Inc. All rights reserved.

521149-UTG-B-0210  
 Supersedes: 521149-UTG-A-0809

**Johnson Controls Unitary Products**  
**5005 York Drive**  
**Norman, OK 73069**